



REGENCY

RESIDENTIAL DOORS





REGENCY RESIDENTIAL DOORS

Your Choice

The Regency door range from Newark Glass forms part of the company's comprehensive range of PVC-U windows & doors, all designed to meet the demands of UK householders and to withstand the unique British climate. All feature multi-chambered construction for great strength and superb sound and thermal insulation properties.

Despite its strength the PVC-U profile used by Newark Glass has slim, well proportioned sections which meet consumer preferences and, with their 65mm outer frame depth, form ideal replacements for degraded wooden door frames.

Available in white, cherrywood, light oak or mahogany woodgrain PVC-U, Newark Glass' doors feature Rhino combination hook and shootbolt locking, and are glazed with either toughened Pilkington K Glass or one of our range of reinforced PVCu

decorative panels - which are available with a wide range of attractive patterns.


The Regency door range can be configured to suit your home, or your particular needs - for example you can have Single or French doors; a single door with a side screen or a fanlight (or both); a low threshold with or without ramp for easy wheelchair or pushchair access; you can choose the position and style of letterplate; and finally there is a choice of handle colour and style.

With Newark Glass you can have the door you want.



DOUBLE DOORS WITH RESTR

DOOR STYLES

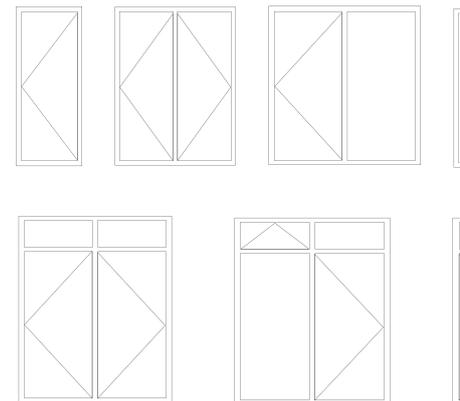

MANY MORE STYLES ARE AVA



DOOR & SIDE PANEL



WHITE FINISH



DOUBLE DOORS



LIGHT OAK FINISH




CTOR



SINGLE DOOR



CHERRYWOOD FINISH

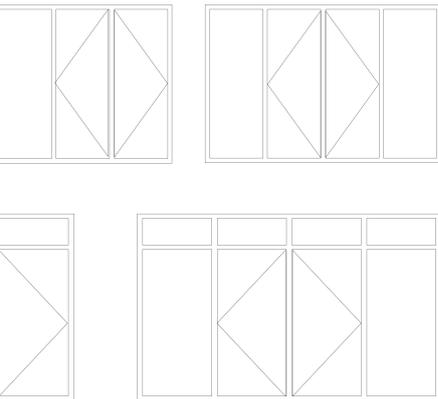

AVAILABLE...



STANDARD THRESHOLD

REGENCY

RESIDENTIAL DOORS

SPECIFICATION

DOOR DESIGN

Newark Glass Regency residential doors are produced in two basic configurations: Open-In with Internal Beading or Open-Out with Internal Beading. Transoms can be mechanically fixed or thermally welded while major structural components such as the upright mullions are welded.

GLAZING

Newark Glass Regency doors are fitted as standard with 28mm square-edged sealed toughened glazing units, or a reinforced decorative panel and are internally beaded for security.

To further enhance the door's thermal insulation properties we use Pilkington K Glass that actually reflects heat back into the room.

REINFORCEMENT

The intrinsic strength of the profile is supplemented where necessary by the inclusion of Steel and/or Aluminium reinforcing in transoms, mullions, opening vents and the outer frame where extra support is desirable.

WEATHERSEALS

Dual weatherseals fitted to all opening vents have excellent weathering characteristics to ensure long-term reliability and consistent performance.

HARDWARE

The hinges, locks and handles used on the Regency range have been chosen to provide the combined benefits of reliable operation, ease of opening, high security when closed and colours to match the door.

The locking system used as standard utilises a form of Hook-Lock that is more secure than normal shootbolts.

QUALITY ASSURANCE

Newark Glass is registered to ISO9001:2000 for the manufacture of windows, doors, sealed units and conservatories and employs full-time QA staff including Inspectors and Testers.

FURTHER DETAILS

Details of the full Regency range and our other products are available from any of our offices and on our website:

WWW.NEWARKGLASSGROUP.COM



www.securedbydesign.com



OAK TREE HOUSE, BRUNEL DRIVE
NEWARK, NG24 2EG - 01636 610088
WWW.NEWARKGLASSGROUP.COM

