



# REGENCY

CASEMENT WINDOWS





# REGENCY

## CASEMENT WINDOWS

## Style & Value

The Regency window range from Newark Glass forms part of the company's comprehensive range of PVC-U windows & doors, all designed to meet the demands of UK householders and to withstand the unique British climate. All feature multi-chambered construction for great strength and superb sound and thermal insulation properties.

Despite its strength the PVC-U profile used by Newark Glass has slim, well proportioned sections which meet consumer preferences and, with their 65mm outer frame depth, form ideal replacements for degraded wooden window and door frames.

Available in white, cherrywood, light oak or mahogany woodgrain PVC-U, Newark Glass' casement windows feature side-hung or top-hung vents, optionally combined with direct glazed fixed lights, and the vents can even be fitted with

easy-clean hinges allowing access to the outside. Also, where Building Regulations demand it, fire escape hinges will be fitted.


The Regency range of windows are subjected to rigorous weathering and forced-entry testing by the BSI and the range carries three Kitemarks - your guarantee of Quality and Performance - including the High Security BS7950.

All in all the Regency range represents outstanding quality and value for money.



DECORATIVE SASH HORNS

## WINDOW STYLES

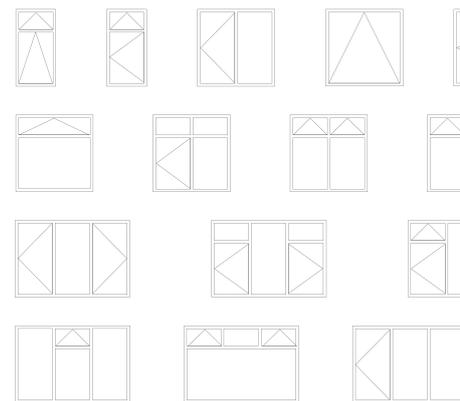

MANY MORE STYLES ARE AVAILABLE



GEORGIAN BARS



WHITE FINISH



BEVELLED GLASS




LIGHT OAK FINISH



FIRE ESCAPE OPTION



CHERRYWOOD FINISH

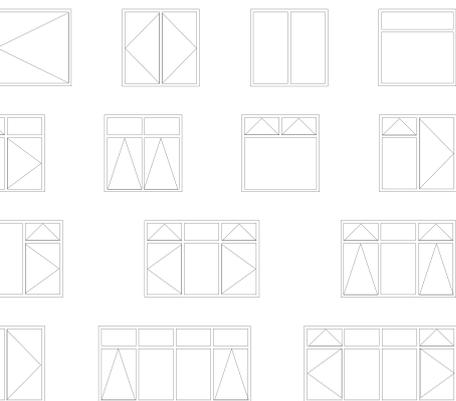

AVAILABLE...



WINDOWS & DOORS



LEADED LIGHTS

# REGENCY

## CASEMENT WINDOWS

### SPECIFICATION

#### WINDOW DESIGN

Casement windows provide an extremely versatile range of sizes, shapes and styles with top or side opening to suit customers' needs in both domestic and commercial applications. Transoms and mullions are mechanically fixed, while alternative cills and ancillary components broaden the choice even further.

#### GLAZING

Newark Glass casement windows are fitted with 28mm square-edged hermetically sealed glazing units. Glazing units are fixed using high-security retention devices, an adhesive glazing tape and by external glazing beads with integral gaskets that look tidier and are not prone to shrinkage.

To further enhance the window's thermal insulation properties we use Pilkington K Glass that actually reflects heat back into the room.

#### REINFORCEMENT

The intrinsic strength of the profile is supplemented where necessary by the inclusion of Steel and Aluminium reinforcing in transoms, mullions, opening vents and the outer frame where extra support is desirable.

#### WEATHERSEALS

Dual weatherseals fitted to all opening vents have excellent weathering characteristics to ensure long-term reliability and consistent performance.

#### HARDWARE

The hinges, locks and handles used on the Regency range have been chosen to provide the combined benefits of reliable operation, ease of opening, high security when closed and colours to match the window.

#### QUALITY ASSURANCE

Newark Glass is registered to ISO9001:2000 for the manufacture of windows, doors, sealed units and conservatories and employs full-time QA staff including Inspectors and Testers.

The Regency range of windows has also been tested independently by the BSI and carries the BS7412 Kitemark.

#### FURTHER DETAILS

Details of the full Excalibur range and our other products are available from any of our offices and on our website:

[WWW.NEWARKGLASSGROUP.COM](http://WWW.NEWARKGLASSGROUP.COM)

We reserve the right to alter specifications and descriptions without prior notice as part of our policy of continuous development  
Images for illustration purposes only. E&OE.

©2004-2008 Newark Glass Company Ltd and its Licensees. All Rights Reserved



 **synseal**  
ask for it by name



[www.securedbydesign.com](http://www.securedbydesign.com)



OAK TREE HOUSE, BRUNEL DRIVE  
NEWARK, NG24 2EG - 01636 610088  
[www.newarkglassgroup.com](http://www.newarkglassgroup.com)

